


- Compatible with most PIXE chambers including Oxford Microbeam
- Detectors designed for all environments;
 - Air
 - Vacuum
 - He Flush
- Active areas from 10 to 170mm² per channel
- Full range of x-ray window options;
 - Beryllium
 - Polymer
 - Silicon Nitride
 - Graphene



- Passively Cooled (fan and LN₂ free)
- DX200 Digital pulse processor available
- All designs customisable to meet requirements;
 - Tube Length
 - Flange type
 - Slide
 - Custom Geometry
 - etc...

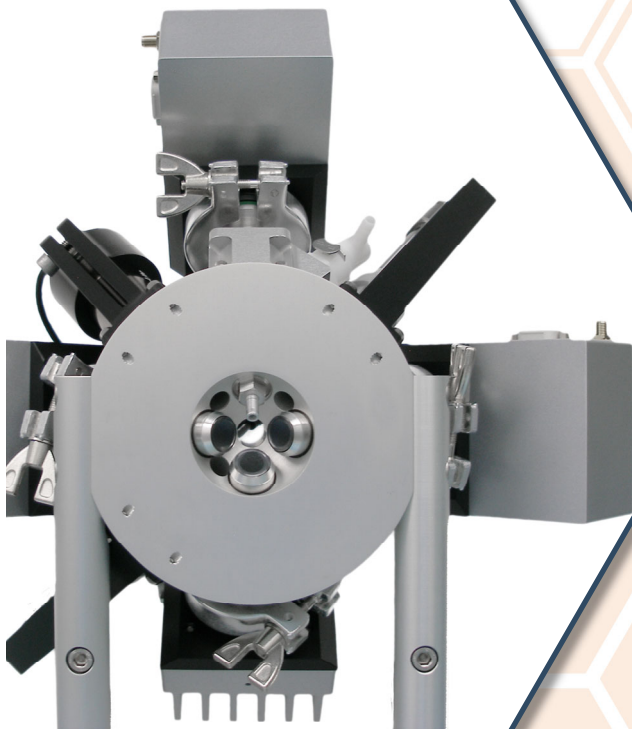

Contact us to discuss your options

Tel: +44 (0) 1628 533060

Email: sales@rayspec.co.uk

Web: www.rayspec.co.uk